

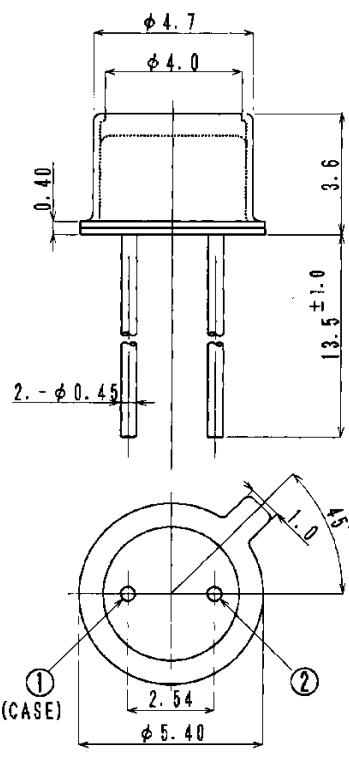
Data sheet

page 1 of 2

Infrared LED
EOLD-1200-095

Rev. 02, 2017

Radiation	Type	Case
Infrared	InGaAs/InP, MQW	TO-46 package with flat window

 All dimensions in mm	Description: High-power, high speed, wide beam angle, high reliability
	Application: Optical switches, optical communication, safety equipment, automation, applications requiring high output and precise optical / mechanical axis alignment.

Maximum Ratings

 T_{amb}=25°C, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current		I _F	100	mA
Peak forward current (pulse)	pulse width=10 µs, duty=1%	I _{FP}	200	mA
Reverse voltage	I _R =100 µA	V _R	5	V
Power dissipation		P _D	150	mW
Operating temperature range		T _{amb}	-25 to +85	°C
Storage temperature range		T _{stg}	-30 to +100	°C
Lead soldering temperature	t < 5 s, 3 mm from case	T _{sld}	260	°C
Junction temperature		T _J	100	°C



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

Data sheet

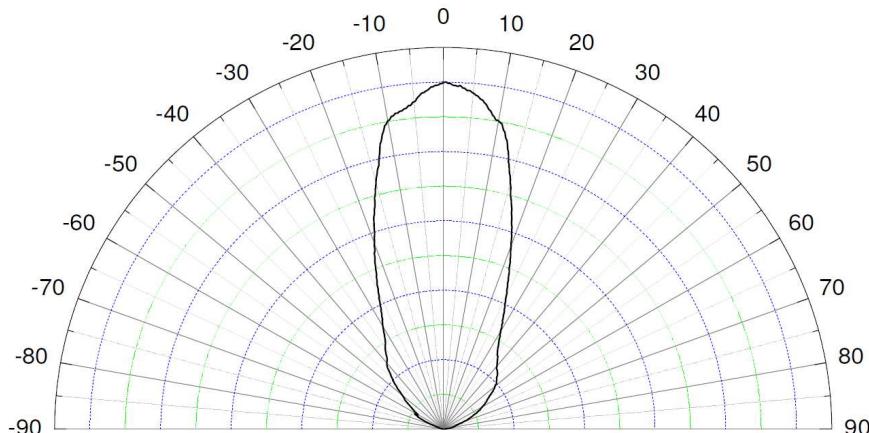
page 2 of 2

Infrared LED**EOLD-1200-095**

Rev. 02, 2017

Optical and Electrical Characteristics
 $T_{amb} = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F = 20 \text{ mA}$		0.9	1.0	V
Forward voltage	V_F	$I_F = 50 \text{ mA}$		0.95	1.1	V
Forward voltage	V_F	$I_F = 100 \text{ mA}$		1.0	1.2	V
Reverse current	I_R	$V_R = 5 \text{ V}$		10		μA
Radiant power	Φ_e	$I_F = 20 \text{ mA}$		1.5		mW
Radiant power	Φ_e	$I_F = 50 \text{ mA}$		3.5		mW
Radiant power	Φ_e	$I_F = 100 \text{ mA}$		6		mW
Peak wavelength	λ_p	$I_F = 50 \text{ mA}$	1170	1200	1230	nm
FWHM	$\Delta\lambda_{0,5}$	$I_F = 50 \text{ mA}$		70		nm
Viewing angle	φ	$I_F = 50 \text{ mA}$		$\pm 25 = 50$		deg.
Switching time	t_r, t_f	$I_F = 50 \text{ mA}$		25; 40		ns

**Radiation pattern**

Art. No. 134 094



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.