

EPIGAP Optronik GmbH

Koepenicker Str. 325b, Haus 41

D-12555 Berlin

Fon: +49 (0)30 657637 60

Fax: +49 (0)30 657637 70

sales@epigap-optronic.de

customized optoelectronics




Product Data Sheet

LED Chip VIS

EOLC-670-15

Rev. 01 aus 2011

Radiation	Type	Electrodes
Red	Standard	P (anode) up

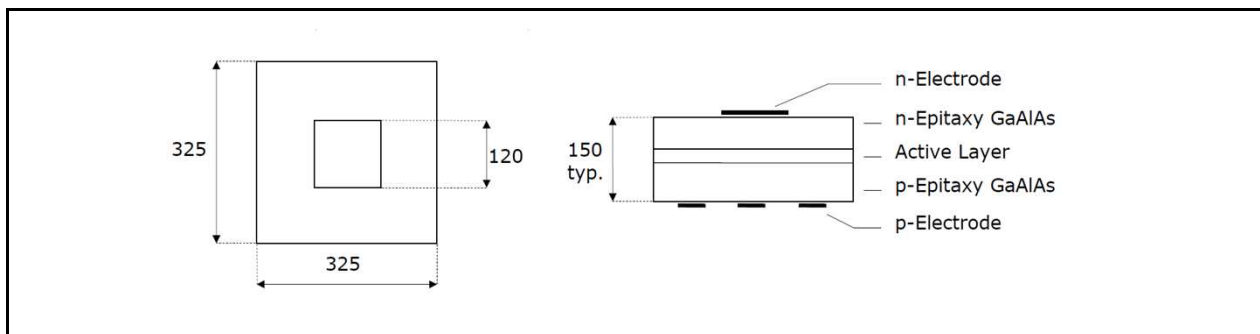

Optical and Electrical Characteristics

T_{amb} = 25°C, unless otherwise specified

Parameter	Test cond.	Symbol	Min	Typ	Max	Unit
Forward voltage	I _F =20mA	V _F		1.90	2.3	V
Reverse voltage	I _R =100μA	V _R	5			V
Output Power ¹	I _F =20mA	Φ _e	1.5	2.0		mW
Switching time	I _F =20mA	t _r , t _f		50/35		ns
Peak wavelength	I _F =20mA	λ _p	665	670	675	nm
Spectral bandwidth at 50%	I _F =20mA	Δλ _{0.5}		22		nm

¹) Measured on EPIGAP gold plate

Labeling

Type	Lot N°	Φ _e (typ) [mW]	V _F (typ) [V]	Qty.
EOLC-670-15				

Packing

Chips on adhesive film with wire bond side up

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.