

# EPIGAP Optronik GmbH

Koepenicker Str. 325b  
D-12555 Berlin  
Fon: +49 (0)30 657637 60  
Fax: +49 (0)30 657637 70  
sales@epigap-optronic.de




## Data Sheet

### LED Chip deep red

### EOLC-670-25

Rev. 03, 2017

Radiation	Type	Electrodes
deep red	AlGaAs/AlGaAs, standard	N (cathode) up

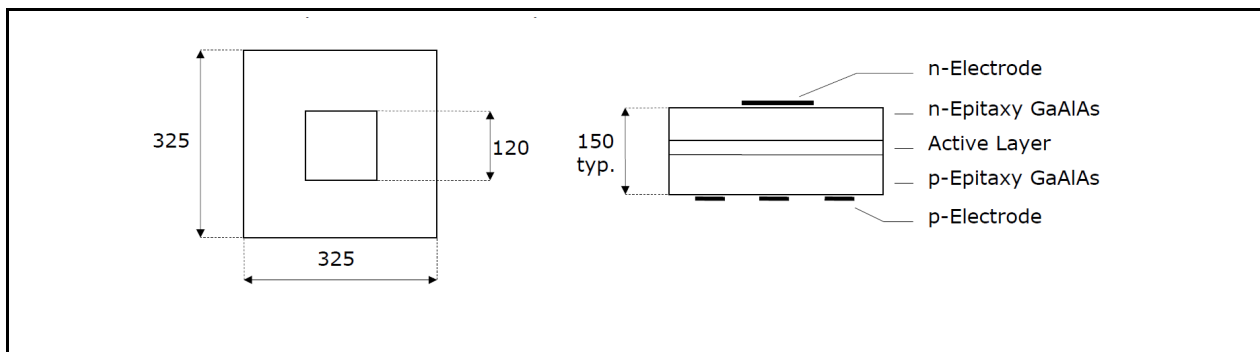

### Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test cond.	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 20 \text{ mA}$	$V_F$		1.85	2.2	V
Reverse voltage	$I_R = 100 \mu\text{A}$	$V_R$	5			V
Radiant power**	$I_F = 20 \text{ mA}$	$\Phi_e$	1.8	2.5		mW
Peak wavelength	$I_F = 20 \text{ mA}$	$\lambda_p$	660	670	680	nm
FWHM	$I_F = 20 \text{ mA}$	$\Delta\lambda_{0.5}$		22		nm
Switching times	$I_F = 20 \text{ mA}$	$t_r, t_f$		45; 35		ns

\*Measured on bare chip on TO-18 header

### Packing

Chips on adhesive film with wire bond side up

Art. No. 112 012



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.