

# EPIGAP Optronik GmbH

Koepenicker Str. 325  
 D-12555 Berlin  
 Fon: +49 (0)30 657637 60  
 Fax: +49 (0)30 657637 70  
 sales@epigap-optronic.de



## Data sheet

Page 1 of 2

### Infrared LED

### EOLD-1650-525

Rev. 02, 2017

Radiation	Type	Case
Infrared	InGaAs/InP, MQW	5 mm plastic lens

Description:	
	<p>High-power, high-speed infrared LED in standard 5 mm package, housing without standoff leads</p> <p>for optical communications, safety equipment and automation</p> <p>All dimensions in mm</p>

### Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Forward current		$I_F$	100	mA
Peak forward current	$t_p \leq 50 \mu\text{s}$ , $t_p / T = 1/2$	$I_{FM}$	200	mA
Power dissipation		$P_D$	100	mW
Operating temperature range		$T_{amb}$	-20 to +80	$^{\circ}\text{C}$
Storage temperature range		$T_{stg}$	-55 to +85	$^{\circ}\text{C}$
Lead soldering temperature	$t < 5 \text{ s}$ , 3 mm from case	$T_{slg}$	260	$^{\circ}\text{C}$

### Optical and Electrical Characteristics

$T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	$V_F$	$I_F = 20 \text{ mA}$		0.7	0.95	V
Forward voltage	$V_F$	$I_F = 100 \text{ mA}$		0.8	1	V
Reverse voltage	$V_R$	$I_R = 10 \mu\text{A}$	5			V
Radiant power	$\Phi_e$	$I_F = 20 \text{ mA}$	1.1	1.5		mW
Radiant power	$\Phi_e$	$I_F = 100 \text{ mA}$	3.4	5		mW
Radiant intensity	$I_e$	$I_F = 20 \text{ mA}$		5.3		mW/sr
Radiant intensity	$I_e$	$I_F = 100 \text{ mA}$		25		mW/sr
Peak wavelength	$\lambda_p$	$I_F = 20 \text{ mA}$	1610	1650	1690	nm
FWHM	$\Delta\lambda_{0,5}$	$I_F = 20 \text{ mA}$		100		nm
Viewing angle	$\varphi$	$I_F = 20 \text{ mA}$		20		deg.
Switching time	$t_r, t_f$	$I_F = 20 \text{ mA}$		25; 45		ns



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

# EPIGAP Optronic GmbH

Koepenicker Str. 325  
D-12555 Berlin  
Fon: +49 (0)30 657637 60  
Fax: +49 (0)30 657637 70  
sales@epigap-optronic.de




## Data sheet

Page 2 of 2

### Infrared LED

### EOLD-1650-525

Rev. 02, 2017

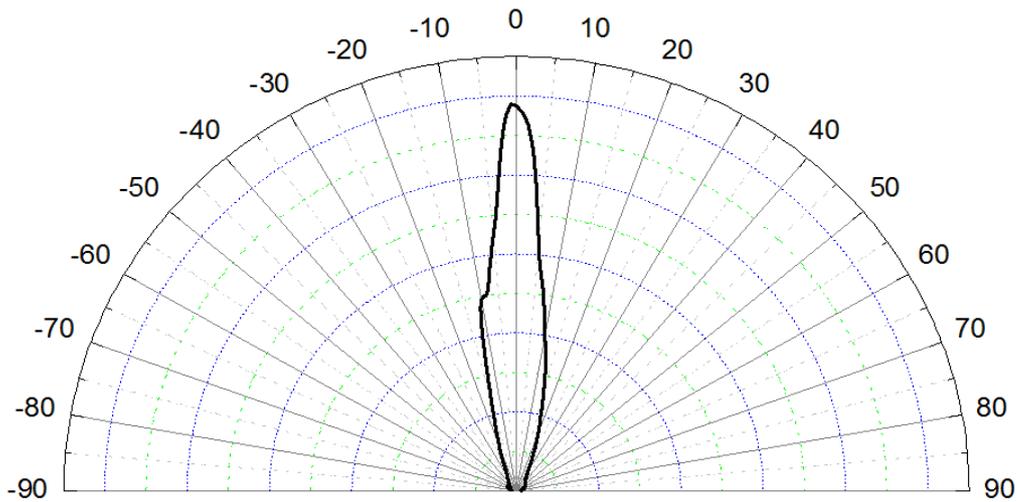

Typical radiation pattern

Art. No. 430 075



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.