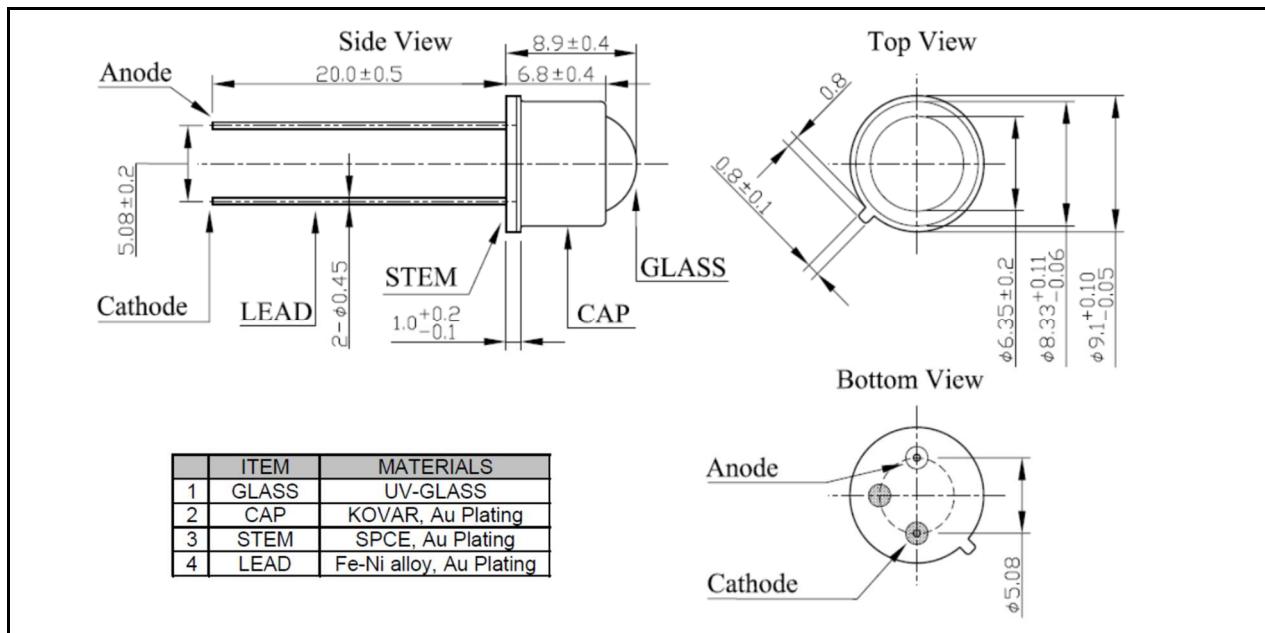


Data sheet
UV LED
EOLD-325-013-6

page 1 of 3

Rev. 02, 2020

Radiation	Type	Case
Ultraviolet (UVA)	AlGaN	metal TO-5 package w. lens


Maximum Ratings

All dimensions in mm. Anode: connected to case, cathode: isolated

 T_{amb} = 25°C, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current		I_F	40	mA
Operating temperature range		T_{amb}	-30 to +80	°C
Storage temperature range		T_{stg}	-40 to +100	°C
Manual soldering temperature	< 3 s	T_{slg}	350	°C
Flow soldering temperature	< 5 s	T_{slg}	250	°C

Optical and Electrical Characteristics
 T_{amb} = 25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F= 20 \text{ mA}$		4.5		V
Radiant power	Φ_e	$I_F= 20 \text{ mA}$		0.9		mW
Peak wavelength	λ_p	$I_F= 20 \text{ mA}$	320	325	330	nm
FWHM	$\Delta\lambda_{0.5}$	$I_F= 20 \text{ mA}$		11		nm
Viewing angle	φ	$I_F= 20 \text{ mA}$		6		deg.

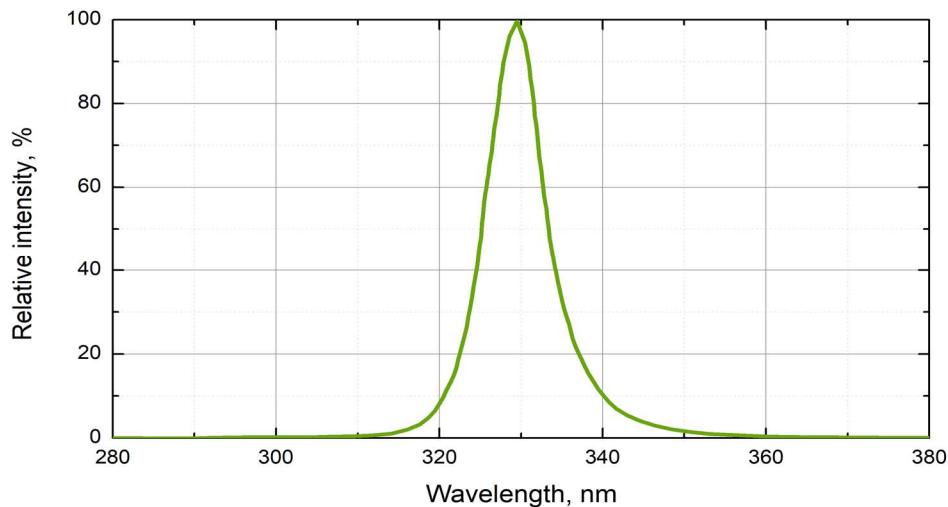
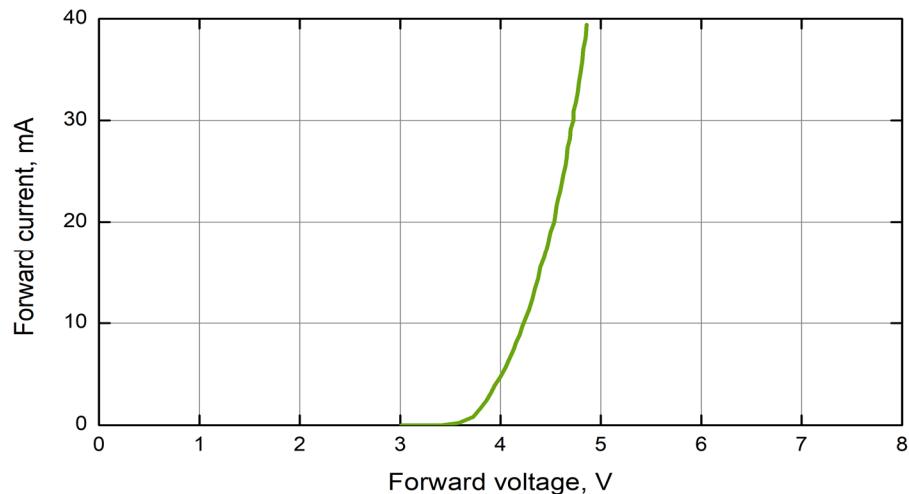


We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

Data sheet**UV LED****EOLD-325-013-6**

page 2 of 3

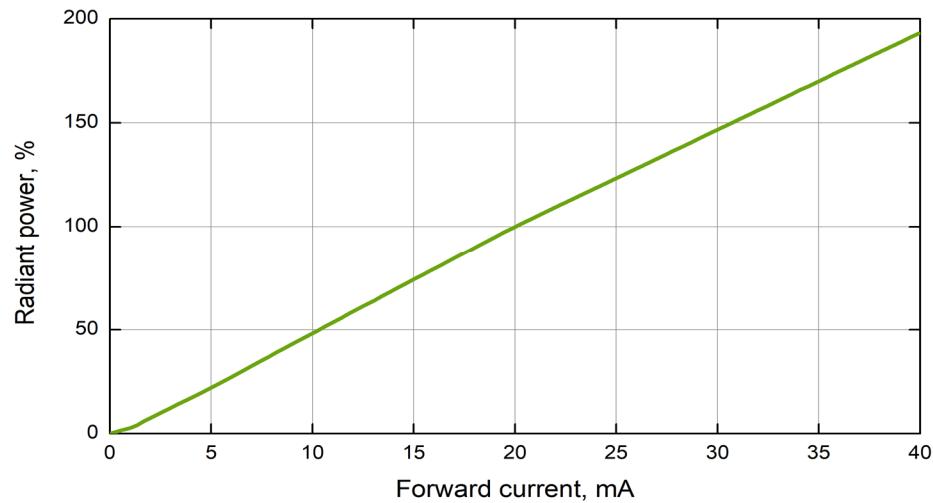
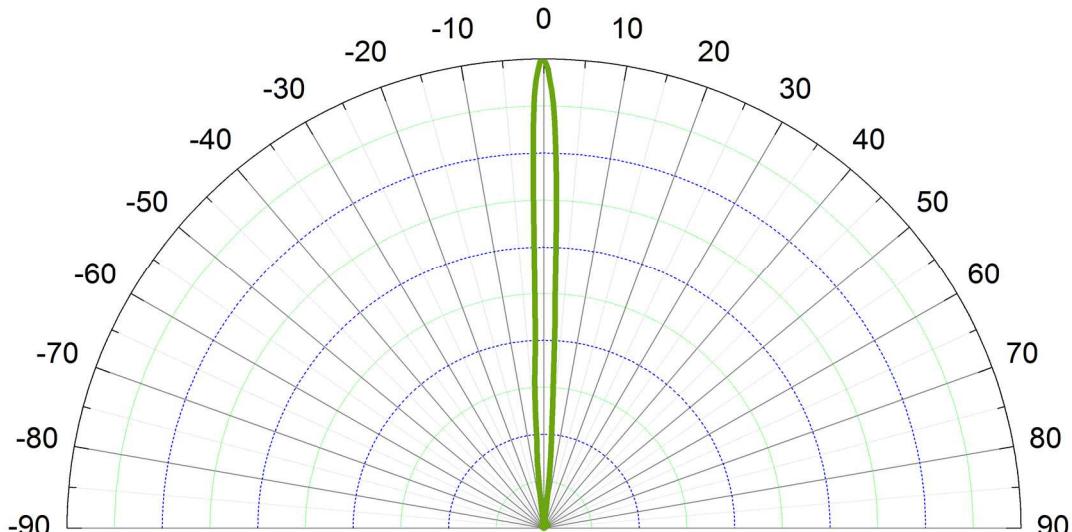
Rev. 02, 2020

**Spectrum @ 20 mA****Forward current vs. forward voltage**

Data sheet**UV LED****EOLD-325-013-6**

page 3 of 3

Rev. 02, 2020

**Radiant power vs. forward current****Radiation pattern**

Art. No. 134 016



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.