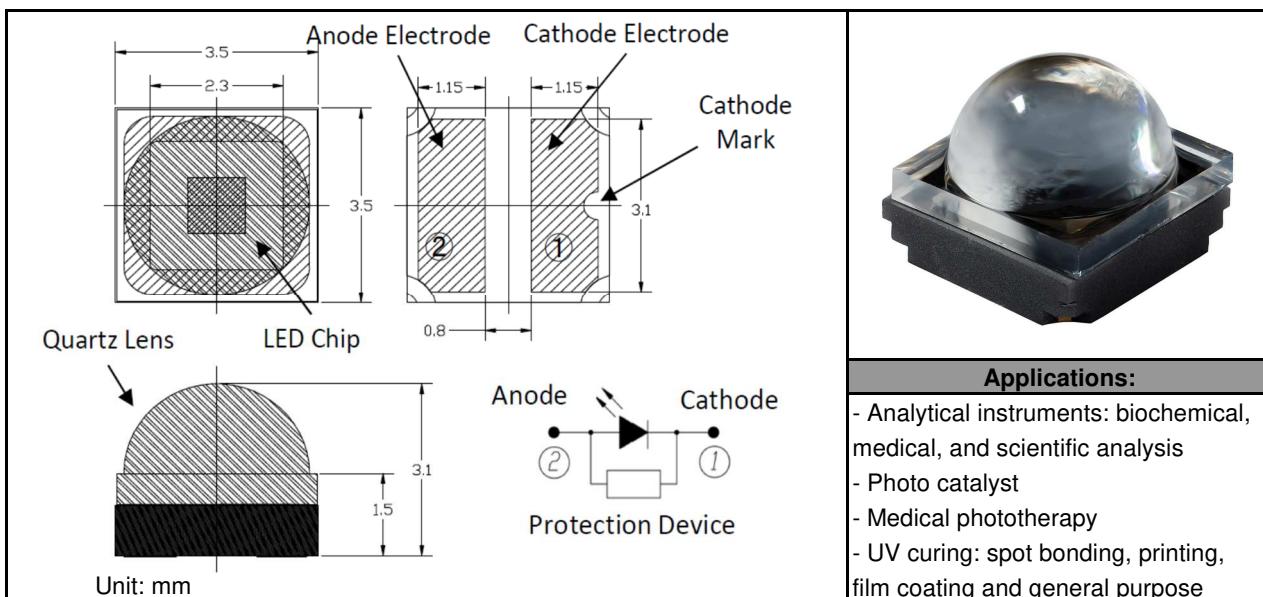


**Data Sheet**
**UV SMD LED**
**EOLS-325-637**

page 1 of 3

Rev. 02, 2020

Radiation	Type	Case
UVA	AlGaN	Metal sealed SMD 3535 (1414), lens


**Maximum Ratings**
 $T_{amb}$ = 25°C, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current		I <sub>F</sub>	350	mA
Junction temperature		T <sub>J</sub>	90	°C
Operating temperature range		T <sub>amb</sub>	-30 to +85	°C
Storage temperature range	no condensation	T <sub>stg</sub>	-40 to +85	°C

**Optical and Electrical Characteristics**
 $T_{amb}$ = 25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min	typ	max	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 350 mA		5.0		V
Radiant power*	$\Phi_e$	I <sub>F</sub> = 350 mA	26	41		mW
Peak wavelength**	$\lambda_p$	I <sub>F</sub> = 350 mA	320	325	330	nm
FWHM	$\Delta\lambda_{0.5}$	I <sub>F</sub> = 350 mA		15	20	nm
Viewing angle	$\phi$	I <sub>F</sub> = 350 mA		35		deg

 \*Radiant power measurement tolerance is  $\pm 10\%$ .

 \*\*Peak wavelength measurement tolerance is  $\pm 3$  nm.



## Data Sheet

**UV SMD LED**


**EOLS-325-637**

page 2 of 3


Rev. 02, 2020

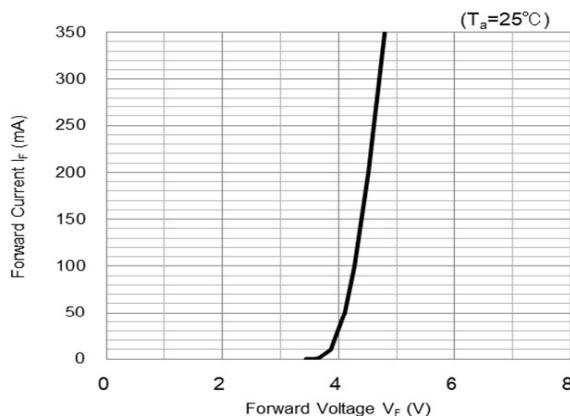


**Forward current vs forward voltage**

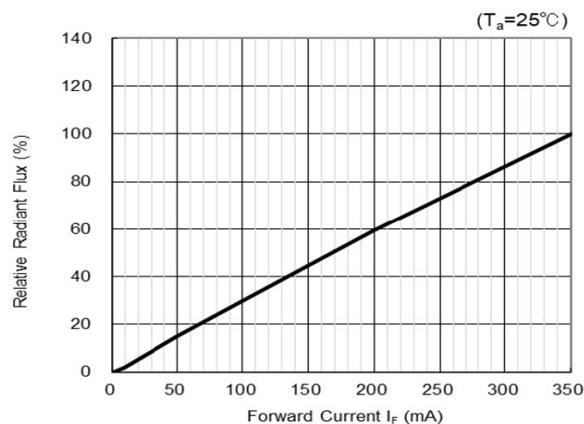


**Radiant power vs forward current**

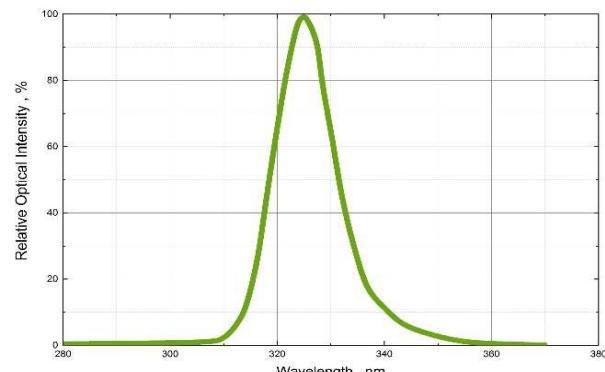


**Spectrum @ 350 mA**

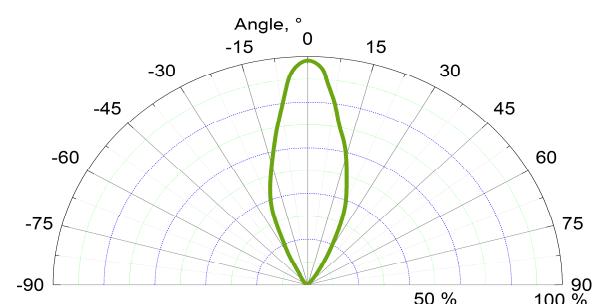

**Radiation pattern**

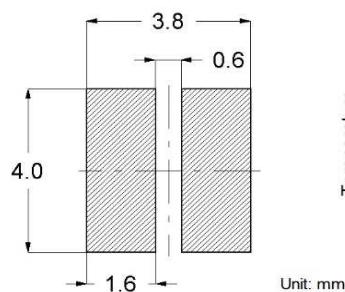

**Recommended solder pad**

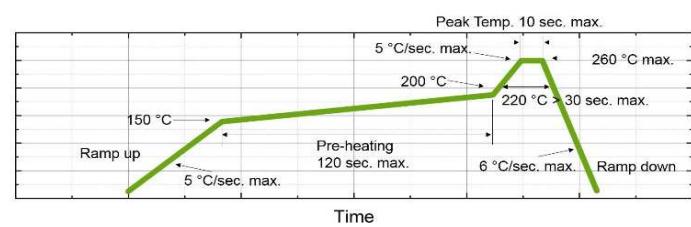



**Reflow soldering profile**



**Data Sheet****UV SMD LED****EOLS-325-637**

page 3 of 3

Rev. 02, 2020

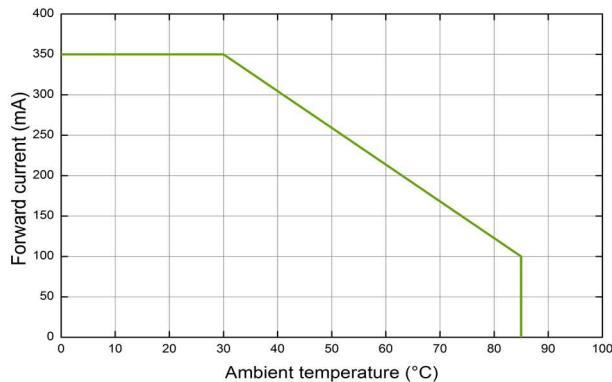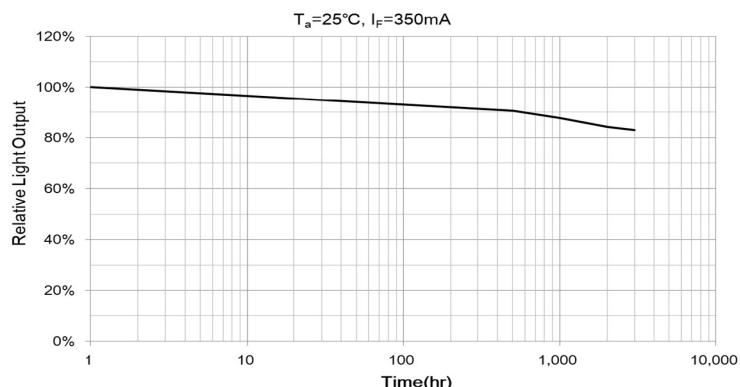**Thermal derating curve****Life test @ 350 mA**

Art. No. 133 276



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.