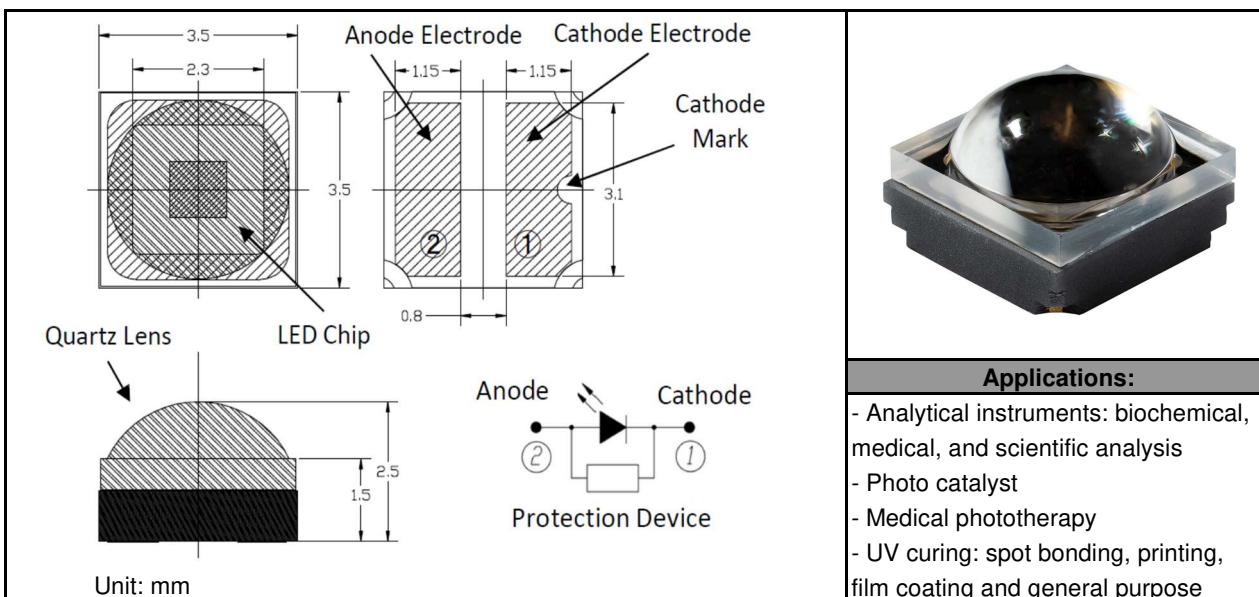


Data Sheet
UV SMD LED
EOLS-325-667

page 1 of 3

Rev. 02, 2020

Radiation	Type	Case
UVA	AlGaN	Metal sealed SMD 3535 (1414), lens


Maximum Ratings
 $T_{amb} = 25^\circ\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current		I_F	350	mA
Junction temperature		T_J	90	°C
Operating temperature range		T_{amb}	-30 to +85	°C
Storage temperature range	no condensation	T_{stg}	-40 to +85	°C

Optical and Electrical Characteristics
 $T_{amb} = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	typ	max	Unit
Forward voltage	V_F	$I_F = 350 \text{ mA}$		5.0		V
Radiant power*	Φ_e	$I_F = 350 \text{ mA}$	29	45		mW
Peak wavelength**	λ_p	$I_F = 350 \text{ mA}$	320	325	330	nm
FWHM	$\Delta\lambda_{0.5}$	$I_F = 350 \text{ mA}$		15	20	nm
Viewing angle	ϕ	$I_F = 350 \text{ mA}$		65		deg

 *Radiant power measurement tolerance is $\pm 10\%$.

 **Peak wavelength measurement tolerance is $\pm 3 \text{ nm}$.



Data Sheet

UV SMD LED


EOLS-325-667

page 2 of 3


Rev. 02, 2020

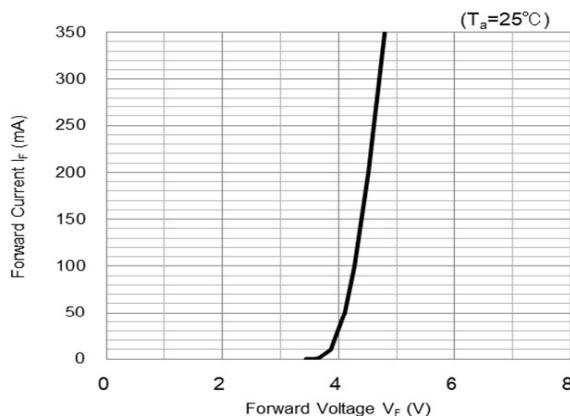


Forward current vs forward voltage

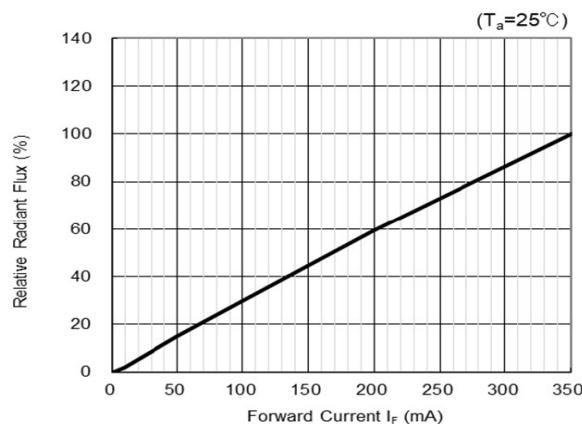


Radiant power vs forward current

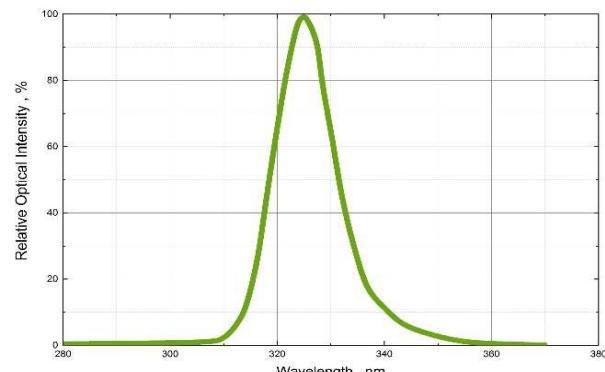


Spectrum @ 350 mA

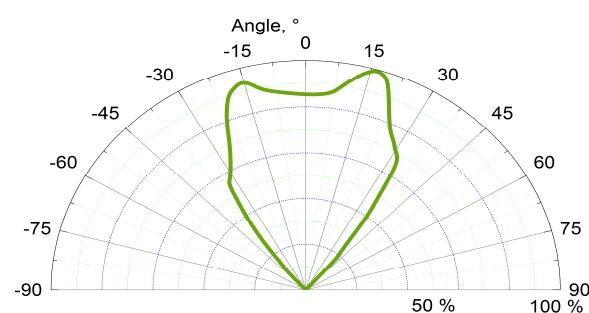

Radiation pattern

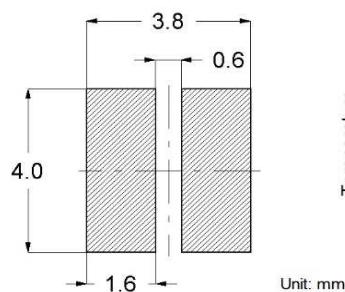

Recommended solder pad

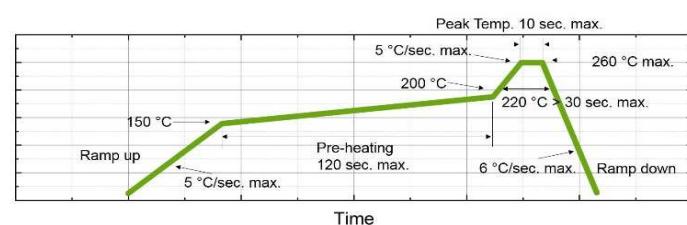



Reflow soldering profile



Data Sheet**UV SMD LED****EOLS-325-667**

page 3 of 3

Rev. 02, 2020

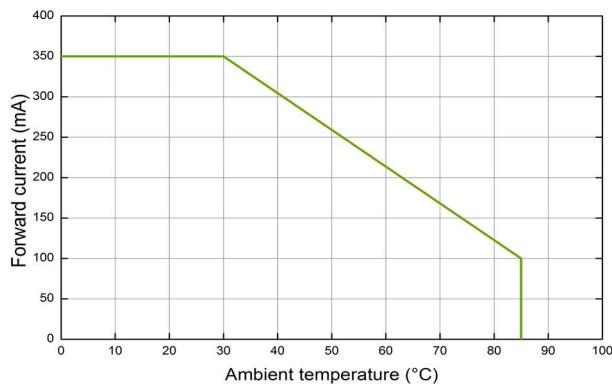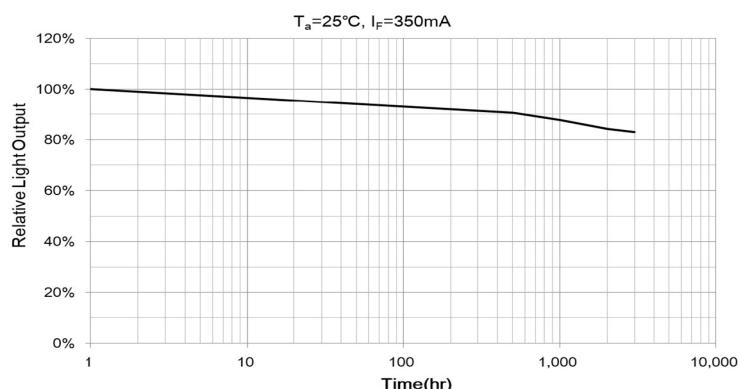**Thermal derating curve****Life test @ 350 mA**

Art. No. 133 277



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.