


Data Sheet

High Power LED


EOLS-533-496

Radiation	Type	Case
Green	InGaN	SMD 3838 (1515)

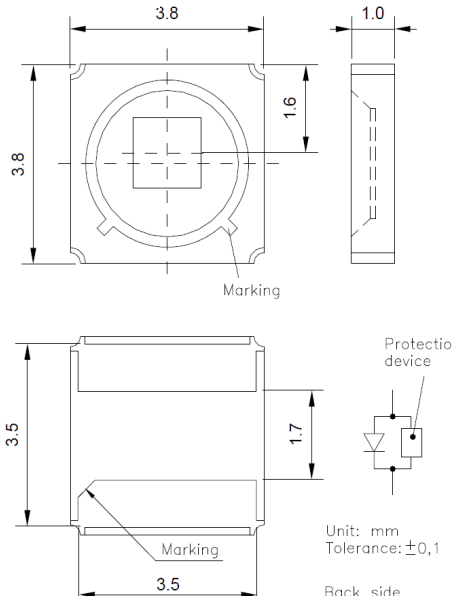

Unit: mm
Tolerance: ±0,1

Back side



The picture shown is for illustration purpose only.
Actual product may vary due to product enhancement.

Description:

- Size 3.8 (W) x 3.8 (L) x 1.0 (H) mm
- Circuit substrate: AlN ceramics
- Marking at cathode
- Lead free solderable, soldering pads: silver plated
- Distance from bottom of SMD to chip top surface: 450±70 µm

Maximum Ratings

T_{amb}= 25°C, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Forward current		I _F	350	mA
Peak forward current	t _p ≤ 50 ms, T=6 s	I _{FM}	1600	mA
Operating temperature range		T _{amb}	-40 to +85	°C
Storage temperature range		T _{stg}	-40 to +85	°C

Optical and Electrical Characteristics

T_{amb}= 25°C, unless otherwise specified

Parameter	Symbol	Conditions	Min	typ	max	Unit
Forward voltage	V _F	I _F = 350 mA	3.0	3.4	4.0	V
Forward voltage	V _F	I _F = 700 mA		3.5		V
Forward voltage	V _F	I _F = 1000 mA			4.3	V
Radiant power*	Φ _e	I _F = 1000 mA	280			mW
Peak wavelength	λ _p	I _F = 350 mA	526	533	540	nm
Central wavelength	λ _C	I _F = 1000 mA	522	535	538	nm
FWHM	Δλ _{0,5}	I _F = 350 mA		35		nm

* dΦ_e / dI_F > 0 at I_F = 0...I_{FM}. LEDs should never be operated with reverse bias!



EPIGAP Optronic GmbH

Koepenicker Str. 325
D-12555 Berlin
Fon: +49 (0)30 657637 60
Fax: +49 (0)30 657637 70
sales@epigap-optronic.de




Data Sheet


High Power LED

EOLS-533-496


page 2 of 3
Rev. 09, 2019

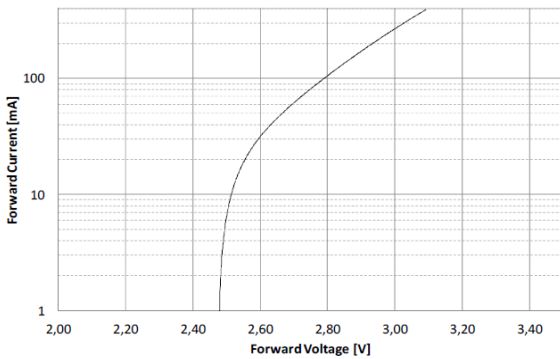


Forward Current vs. Forward Voltage

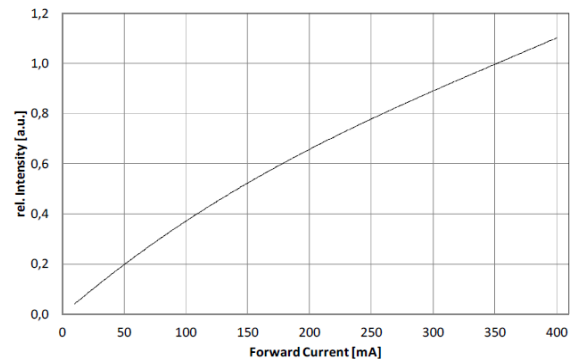

Intensity vs. Forward Current

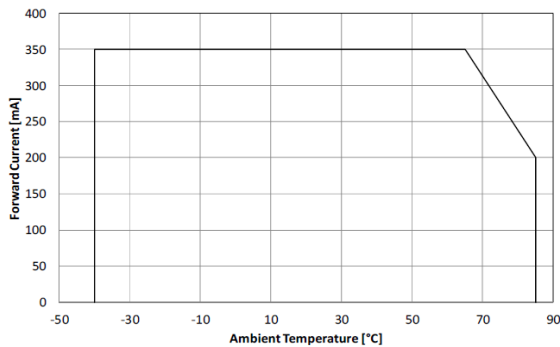


Maximum Forward Current vs. Ambient Temperature

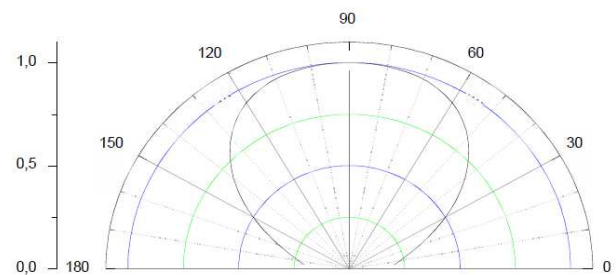

View Angle

Typical spectrum at 350 mA

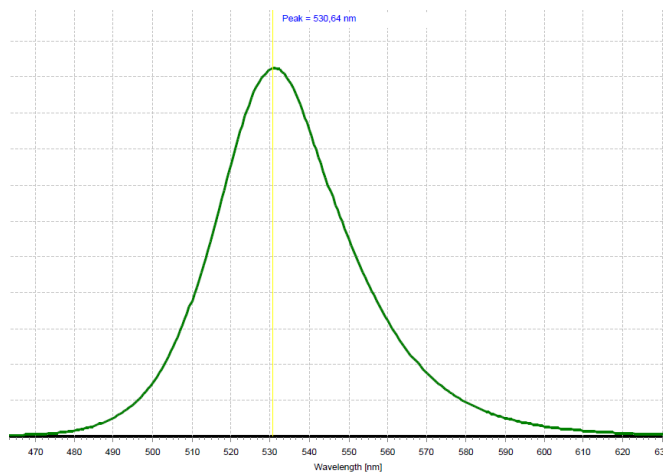

EPIGAP Optronic GmbH

Koepenicker Str. 325
D-12555 Berlin
Fon: +49 (0)30 657637 60
Fax: +49 (0)30 657637 70
sales@epigap-optronic.de




Data Sheet

High Power LED

EOLS-533-496

page 3 of 3
Rev. 09, 2019

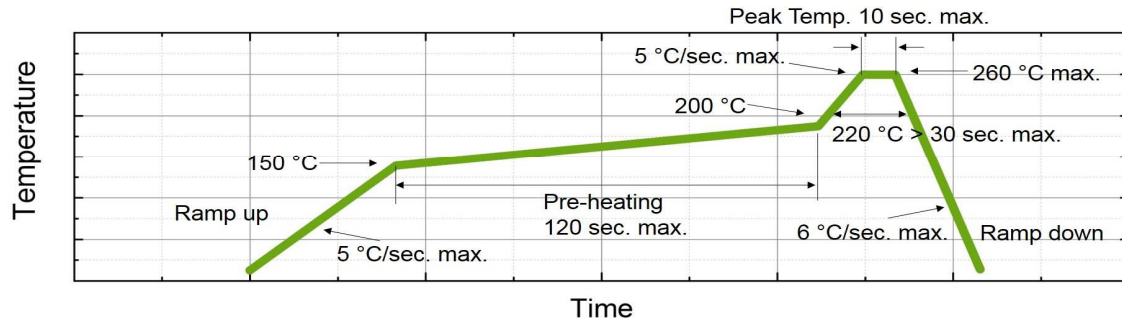

Recommended reflow soldering profile

Art. No. 133 112

