


Data Sheet
Infrared photodiode
EOPD-1300-0-1.5-3

Page 1 of 2

Rev. 02, 2016

Spectral range	Type	Case
Infrared	PIN - InGaAs	TO-46 metal can, glass window cap

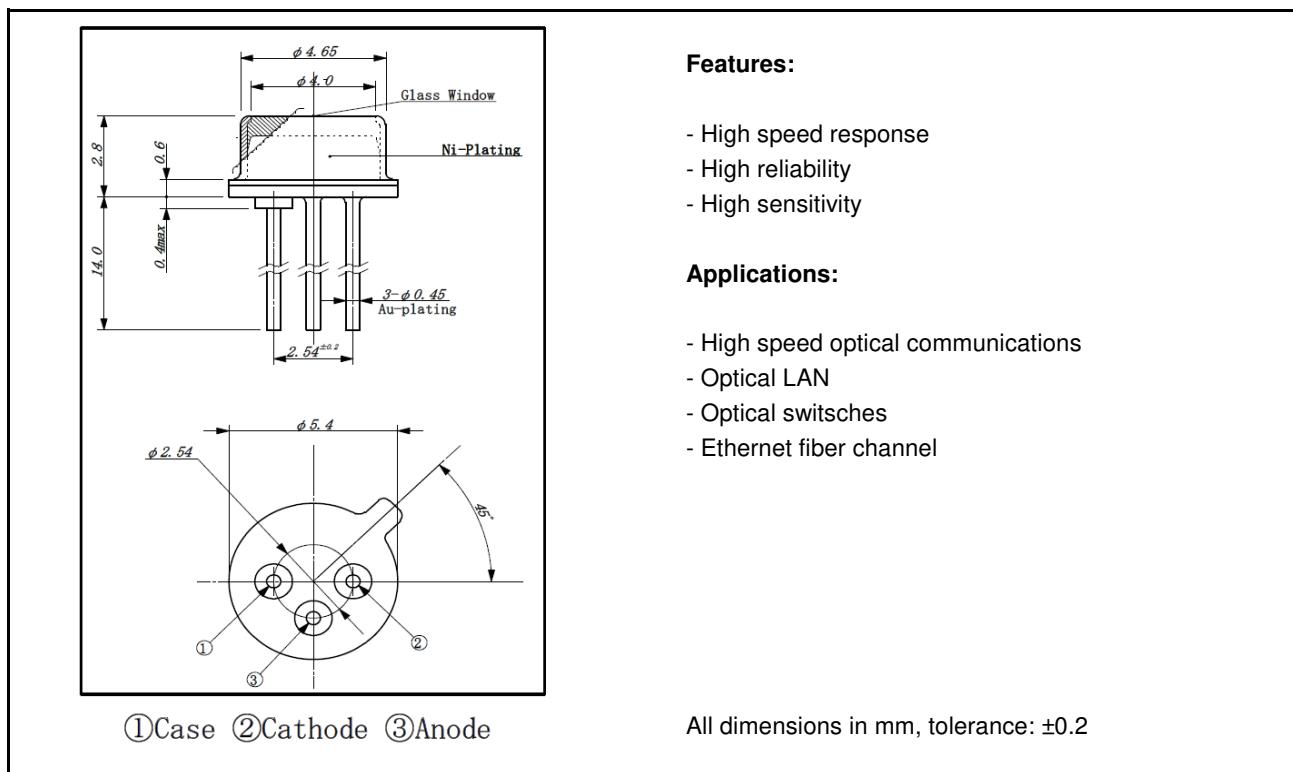

①Case ②Cathode ③Anode

Electro-optical characteristics:

 T_{amb}=25°C, unless otherwise specified


Parameters	Symbol	Min	Typ	Max	Unit	Test conditions
Active area size			$\varnothing 1.5$		mm	
Sensitivity range	λ	800		1750	nm	V _R =0 V
Dark current	I _D			2	μ A	V _R =2 V
Junction capacitance	C _j		200		pF	V _R =0 V
Photocurrent @ 1300 nm	I _{PH}		22		μ A	V _R =5 V, E _e =1 mW/cm ²
Breakdown voltage	V _{BR}	5			V	I _R =10 μ A

Absolute maximum ratings

Parameters	Min	Max	Unit
Operating temperature	-40	+85	°C
Storage temperature	-40	+125	°C



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

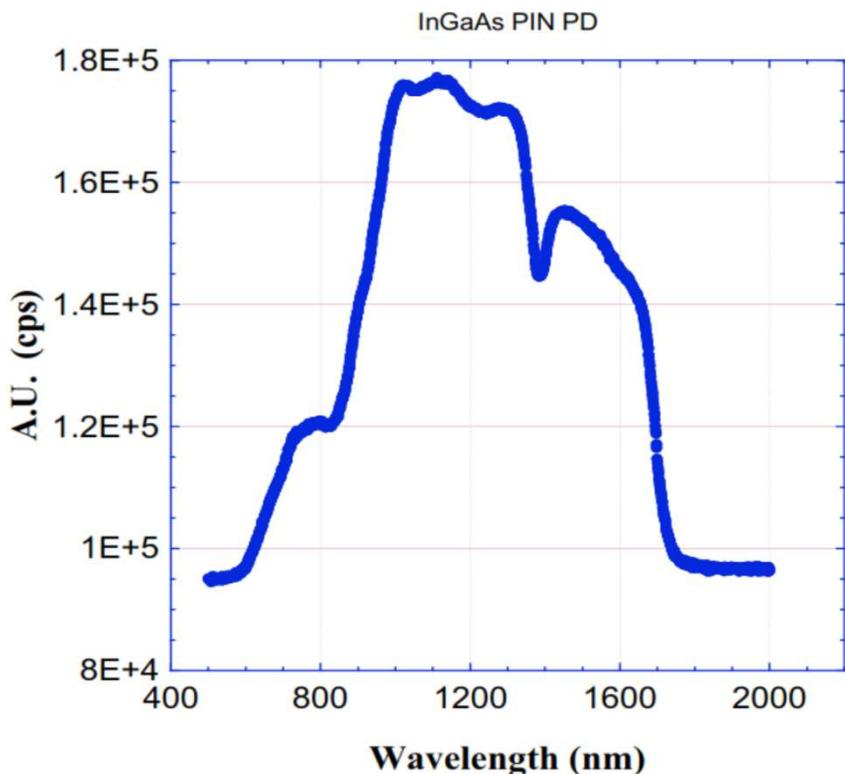Data Sheet**Infrared photodiode****EOPD-1300-0-1.5-3****Page 2 of 2**
Rev. 02, 2016

Art. No. 143 052



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.